

CENTURION-M TWIN

Centurion-M Twin turnstile access control solution is featured with the most space-saving dimensions in combination to affordable price level.



ROBUST TRIPOD TURNSTILE WITH STYLISH DESIGN



600
mm
PASSAGE
WIDTH



25
pers/min
SINGLE ACCESS
FLOW RATE



60
pers/min
FREE ACCESS
FLOW RATE



IP 41-54*
PROTECTIVE LEVEL



DROP-ARM



MOTORIZED



BI-DIRECTIONAL



ACCESS CONTROL
SYSTEM



MANUAL
CONTROL

Key features:

- Seamlessly Integrates with Various Access Control and ID Systems;
- Ergonomically Crafted with Stylish Lines;
- Servo-Driven Tripod Turnstile with Anti-Panic (Drop-Arm) Function;
- Automatic Reset for Anti-Panic Feature;
- Perfect Fusion of Affordability and High Quality;
- Low Power Consumption;
- Backup Battery Power Connection for Continuous Operation;
- Silent Operation Ensures User Comfort;
- Compatible with Ramped Base Mobile Platform (TiSO Frame-M);
- Extensive Array of Accessories for Customization;
- Wired Remote Control Included in Standard Kit;
- Clear Guidance with 4 LED Indicators
- Built-In Space for RFID Readers Under Top Glass;
- Turnstile Supplied Ready for Installation.

*option




Technical Specifications:

Model	Centurion-M Twin
Width, mm	1580
Length, mm	793
Height, mm	1000
Passage width, mm	600
Mechanism	Servo-driven (Triservo-M)
Blocking system	Two electromagnetic stoppers
Emergency mode (fire-alarm)	Fail-safe (Drop arm)
Drop arm function	Drop arm function can be activated when power is on Drop arm function activates automatically when power goes off
MCBF, cycles	5 000 000

Electrical Specifications:

Maximum power consumption, W	55
Voltage	From the AC (100-240)V, 50/60Hz; from a DC source 12 V
Finishing	
Standard housing	Brushed SS AISI 304
Available housing	Brushed SS AISI 316; Polished SS AISI 304; Polished SS AISI 316; Powder coated RAL

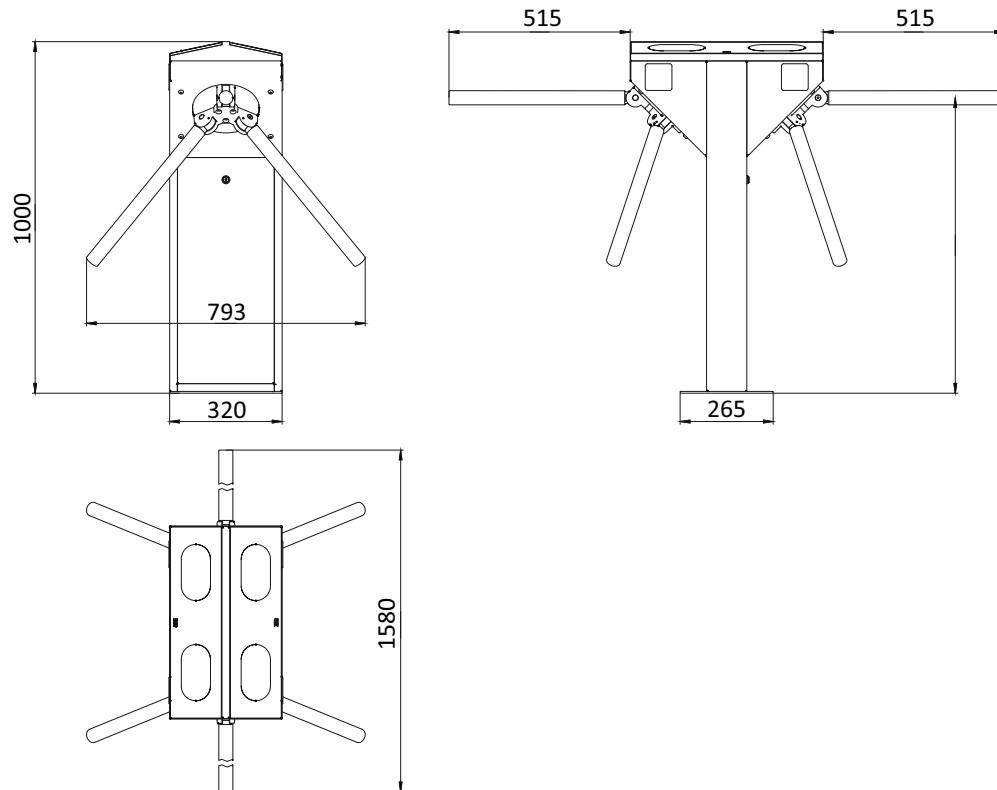

Specifications are subject to change without prior notice.

